


WINDOWS - DOORS - GATES - ROLLERS BLINDS







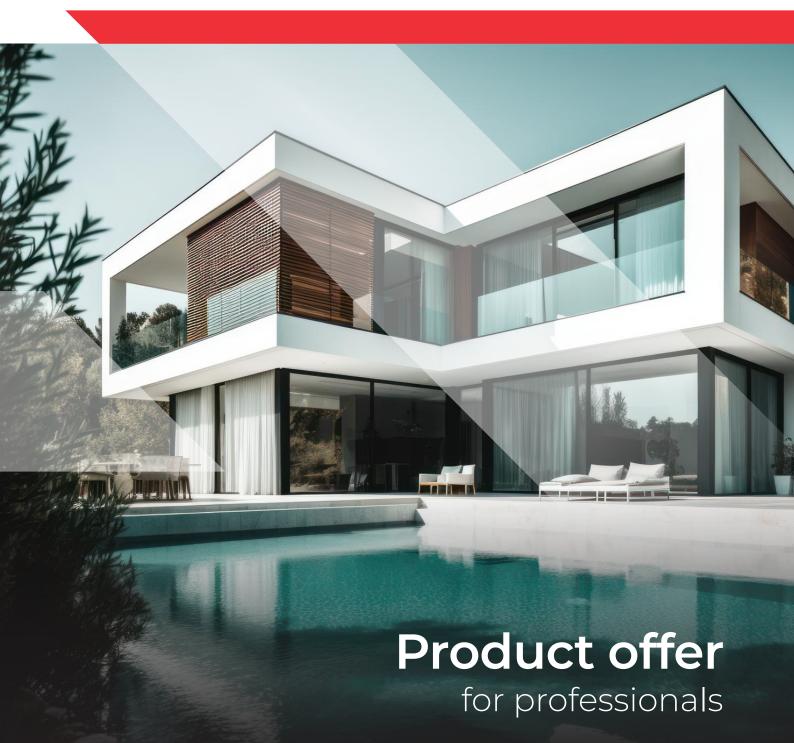





We have been on the market for over 26 years. We build our Customer's success by providing them innovative solutions and the highest quality products while supporting the development of our employees.

We guarantee full technical support and fast delivery by implementing new customer service standards



Own transport fleet

allows fast and safe delivery. Our products are providing to many European countries and currently expanding to other continents. We are always available to support our Customers. We assist with expert advice and numerous training courses to improve the knowledge and qualifications of our business partners.



Wide range of products

- PVC windows
- Aluminium windows
- 🔨 Lift and side doors
- Exterior doors
- External roller blinds
- Facade roller shutters
- 🔨 Glasses

We cooperate with reputable suppliers and distributors from the window industry. We are constantly changing for our customers to provide them ever better products.





0,72



Window and door system ALUPROF **MB-86 N** Depth of frame 77 mm Depth of casement 86 mm Thickness of glazing Frame: 8,5 - 61mm Casement: 17,5 - 70mm U,,, 3 gaskets 0,68

 $^{*}U_{\rm w}$ for opening window MB-86N with casement dimensions 1700x2150 mm, with glass Ug=0,5 W/(m2 K) , with warm swisspacer advance

Window and door system **ALUPROF MB-79 N** Depth of frame 70 mm Depth of casement 79 mm Thickness of glazing Frame: 1,5 - 54mm Casement: 10,5 - 63mm U 3 gaskets 0,83 W/m²K W/m²K

 U_w for opening window MB-79N with casement dimensions 1700x2150 mm, with glass Ug=0,5 W/(m2 K) , with warm swisspacer advance



ALUPROF **MB-104 PASSIVE** Depth of frame 95 mm Depth of casement 104 mm

> Frame: 27 - 72mm Casement: 34,5 - 81mm



0,84 W/m²K

W/m²K





Depth of frame Depth of casement Fill thickness 44 - 77 mm

77 mm 77 mm



 * - U_{\rm o} for door MB-86N SI+ with casement dimensions 1400x3000 mm, with glass U_g=0,5 W/(m²K), with warm swisspacer advance

 $^*U_{\rm w}$ for opening window MB-104 PASSIVE with casement dimensions 1700x2150 mm, with glass Ug=0,5 W/(m2 K) , with warm swisspacer advance



ALL WINDOWS GROUP IN NUMBERS



200 000 m² head office area

5 500 m² of office building area

50 000 m² of area of new factory halls



2 500 daily production of double glazing units





 $\mathbf{100}$

 * - U_w for opening window MB-77HS HI with casement dimensions 3,0x2,9 m, with glass U_=0,5 W/(m²K), with warm swisspacer advance





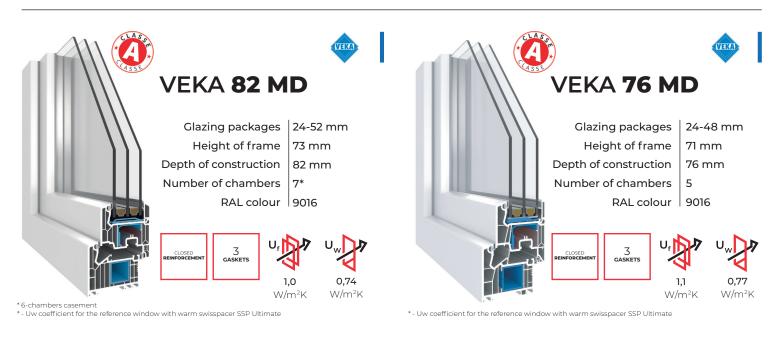

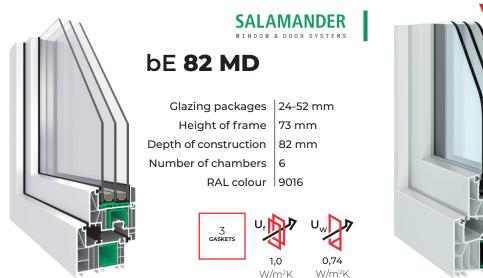






6


66

05.422

373



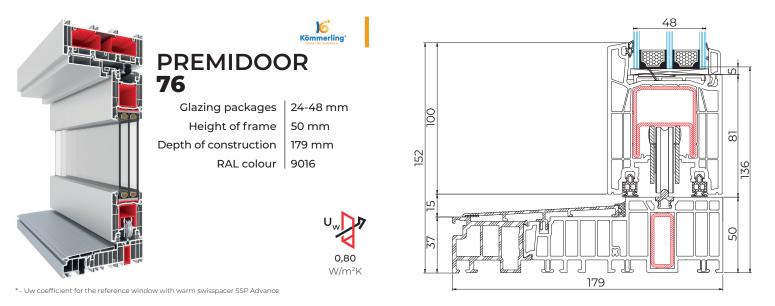

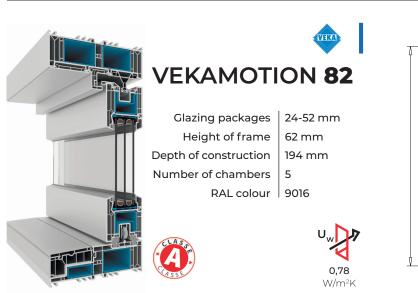

* - Uw coefficient for the reference window with warm swisspacer SSP Advance



SALAMANDER WINDOW & DOOR SYSTEMS

EVOLUTION DRIVE

Glazing packages Height of frame Depth of construction RAL colour


0,77 W/m²K

24-52 mm

50 mm

194 mm

9003/9016

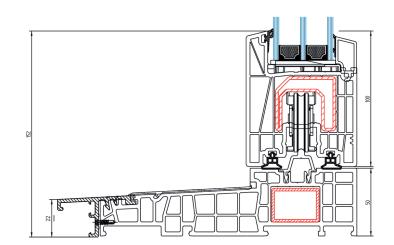

<u>Ū</u>r.r

88

2770

194

אך





Data of sales representative

 \square

 \bigcirc

F

in

All Windows Group

All Windows Group

ul. Karpacka 6 48-303 Nysa Poland

+48 77 433 81 80 +48 77 435 52 33

sekretariat@allwindows.eu

💮 www.allwindows.eu